


TECHNICAL INFORMATION SHEET



PAR1020 Katsura Oak Parquet Collection

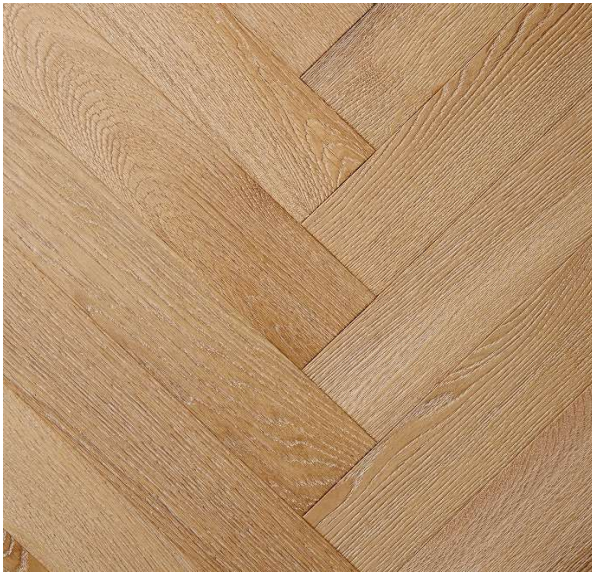

Product Information

Product Name	Katsura Oak
Product Code	PAR1020
Collection	Parquet
Construction	Engineered
Size	15 x 90 x 450mm
Pack Size	0.648m ²
Grade	Rustic
Surface	Brushed
Finish	UV Oiled
Profile	T&G
Edge	Bevelled
Pattern	Herrigbone
Width	90mm
Length	450mm
Thickness	15mm
Wear Layer	3mm
Backing	Eucalyptus
Top Layer	Oak

Additional Information

UKTR Compliance Yes

Installation and Warranty

A&K recommend all floors should be installed by a competent installer. A&K warranties apply only to floors that have been installed according to our fittings instructions found on our website.

Installation Method

Floated	No
Secret Nailed	No
Stuck Down	Yes
Underfloor Heating	Yes

Grading Information

Rustic grade has the potential to include all characteristics across the majority of boards with knots appearing in varying sizes as well as colour variation in the timber to be expected. Sapwood is possible, checks that are likely to be present will be filled in a colour to complement the natural look of the timber.

Technical Information

Formaldehyde Emissions	E1
Pentachlorophenol Emissions	≤ 5 ppm
Thermal Conductivity	0.13W/(mK)
Slip Resistance PTV	61/39
Fire Classification	Dfl-s1
Moisture Content	6-9%
Hardness Rating	1.8kn

This technical information sheet was compiled and written by Atkinson & Kirby. At the time of publication all information is specified correctly. The company reserves the right to change the specification of this product at any time without prior notice for third parties. To confirm the latest information please speak to a member of our team.