


# TECHNICAL INFORMATION SHEET



## BRE1005 Asnen Oak Breathe

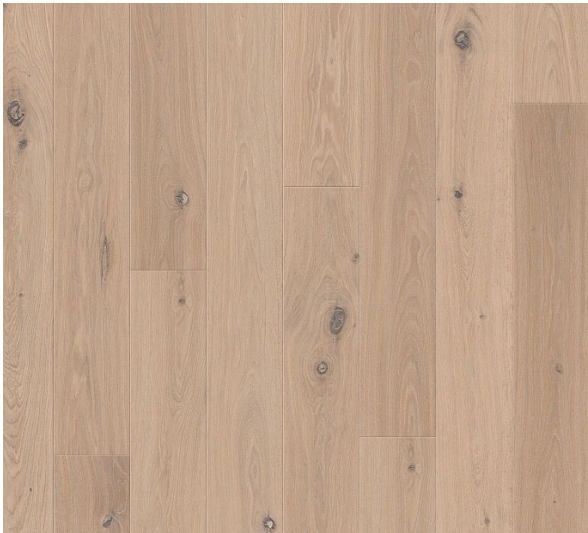

### Product Information

<b>Product Name</b>	Asnen Oak
<b>Product Code</b>	BRE1005
<b>Collection</b>	Breathe
<b>Construction</b>	Engineered
<b>Size</b>	14 x 182 x 2200
<b>Pack Size</b>	2.4m <sup>2</sup>
<b>Grade</b>	Rustic
<b>Surface</b>	Brushed
<b>Finish</b>	Natural Oil
<b>Profile</b>	5G
<b>Edge</b>	Bevelled
<b>Pattern</b>	Plank
<b>Width</b>	182mm
<b>Length</b>	2200mm
<b>Thickness</b>	14mm
<b>Wear Layer</b>	3.6mm
<b>Backing</b>	Spruce
<b>Top Layer</b>	Oak

### Additional Information

<b>Responsible Certification</b>	UKTR Compliant
<b>EPD</b>	Yes
<b>LEED</b>	Yes
<b>UKTR Compliance</b>	Yes

### Installation and Warranty

A&K recommend all floors should be installed by a competent installer. A&K warranties apply only to floors that have been installed according to our fittings instructions found on our website.

### Installation Method

<b>Floated</b>	Yes
<b>Secret Nailed</b>	No
<b>Stuck Down</b>	Yes
<b>Underfloor Heating</b>	Yes

### Grading Information

Rustic grade has the potential to include all characteristics across the majority of boards with knots appearing in varying sizes as well as colour variation in the timber to be expected. Sapwood is possible, checks that are likely to be present will be filled in a colour to complement the natural look of the timber.

### Technical Information

<b>Formaldehyde Emissions</b>	E1
<b>Pentachlorophenol Emissions</b>	Not detectable
<b>Thermal Conductivity</b>	RT = 0,078 m <sup>2</sup> K/W
<b>Slip Resistance PTV</b>	53/22
<b>Fire Classification</b>	Dfl-s1 *Cfl-s1 fully glued down
<b>Moisture Content</b>	7% +/- 2
<b>Hardness Rating</b>	34-41 (Brinell)

This technical information sheet was compiled and written by Atkinson & Kirby. At the time of publication all information is specified correctly. The company reserves the right to change the specification of this product at any time without prior notice for third parties. To confirm the latest information please speak to a member of our team.